

SECURITY CART SLIDING DOOR

#INSTR-SECSLIDINGDOOR



For Super Erecta assembly video
scan here



For MetroMax assembly video
scan here




For detailed instruction scan here




SECURITY CART SLIDING DOOR— INSTRUCTIONS FOR USE

COMPONENTS


LH & RH Rail Mount Set & hardware

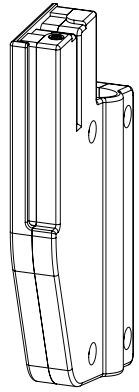

LH Rail Mount
(x1)

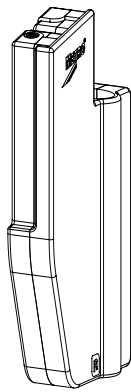


RH Rail Mount
(x1)




#10-24
Flat Head
Screw
(x8)

Slide Rail Assembly

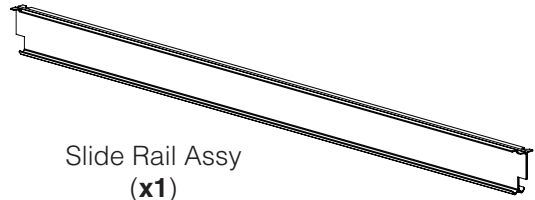

Slide Rail Assy
(x1)

Top Shroud Cover & hardware

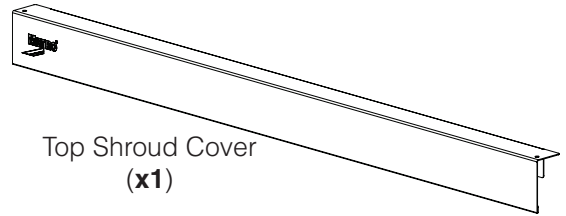


Top Shroud Cover
(x1)




#10-24
Button Head
Screw
(x2)

Side Clamp Components & hardware



Inside Clamp
(x2)




Outside Clamp
(x2)




#10-24
Hex Nut
(x4)

Left Door

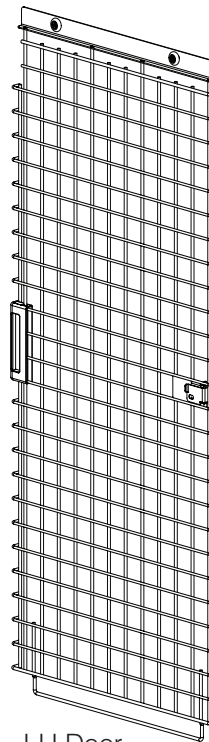


LH Door
(x1)

Right Door

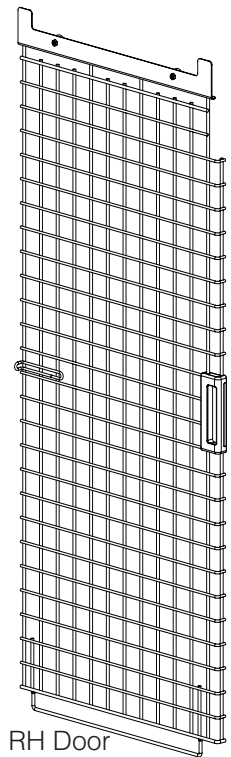


RH Door
(x1)

Bottom U-Channel & Hardware

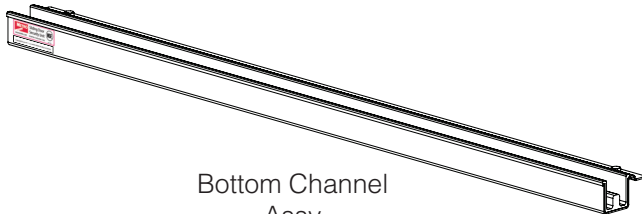


Bottom Channel
Assy
(x1)




Mounting Plate
(x2)



#1/4-20
Nyloc Nut
(x2)



#1/4-20
Screw
(x2)




Security Bracket
(x2)

TWO PEOPLE REQUIRED TO ASSEMBLE UNIT

1

Assembled Security Unit
Without Doors

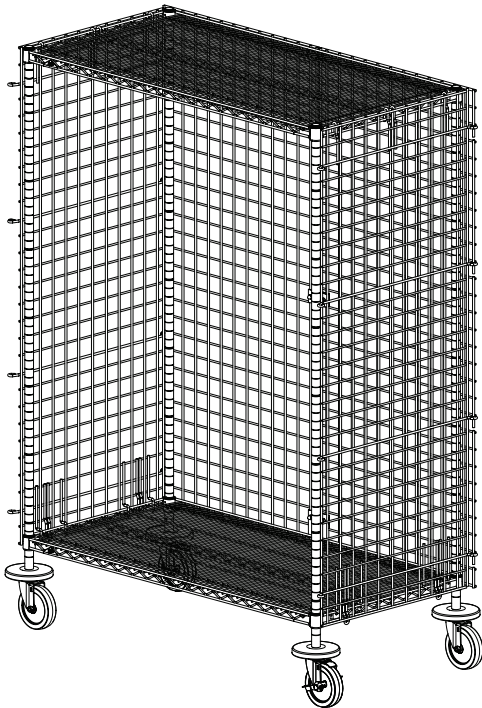


2

Outside
Clamp
x2

Inside
Clamp
x2



#10-24
Hex Nut
x4

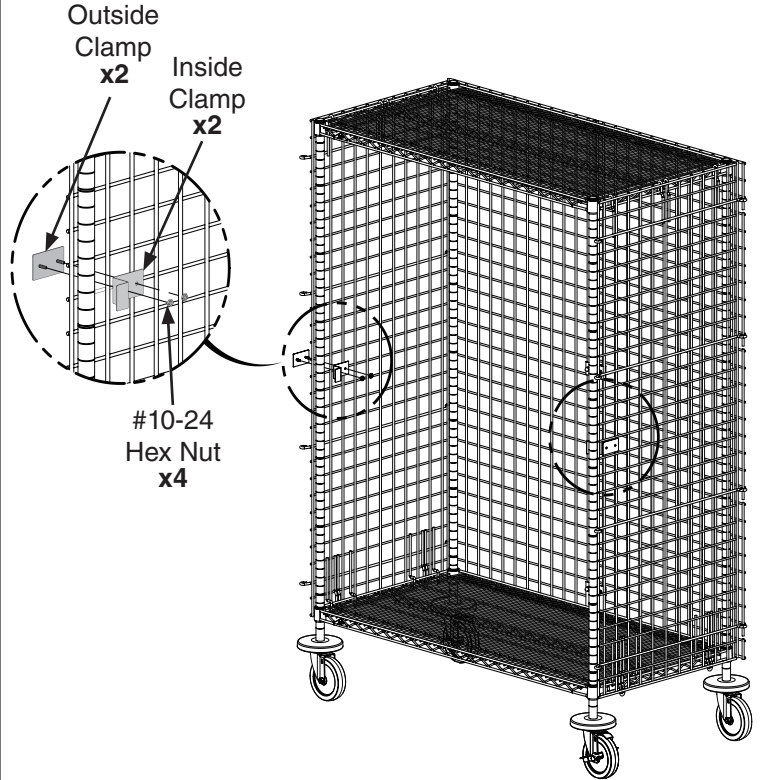

3



Position Rail Mounts
Around The Post

Secure At The
Highest Groove
Under the Shelf

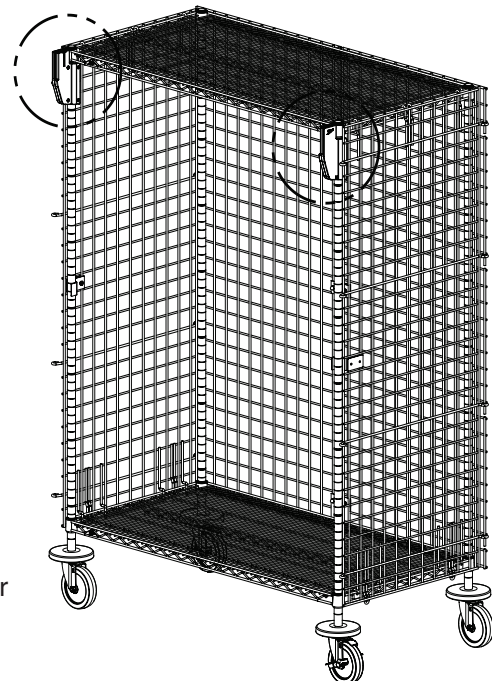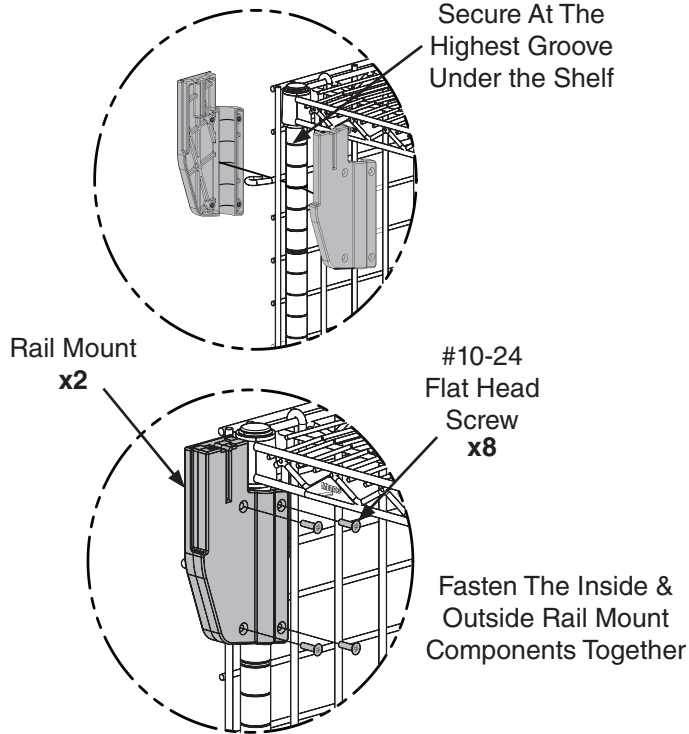



SECURITY CART SLIDING DOOR— INSTRUCTIONS FOR USE

4

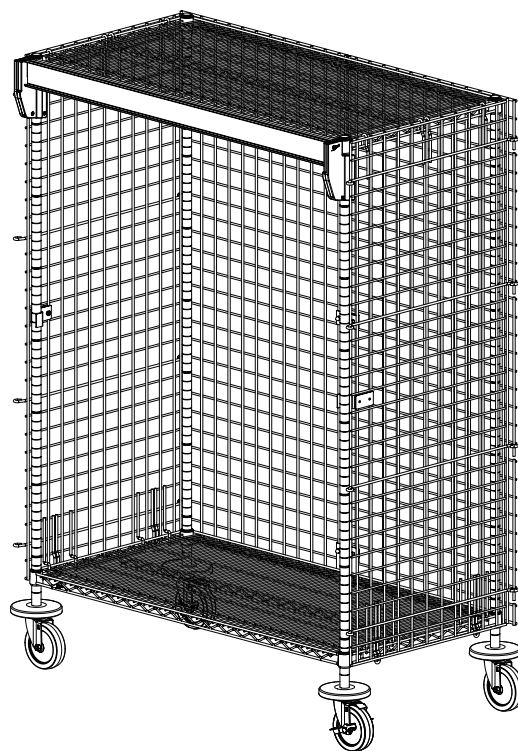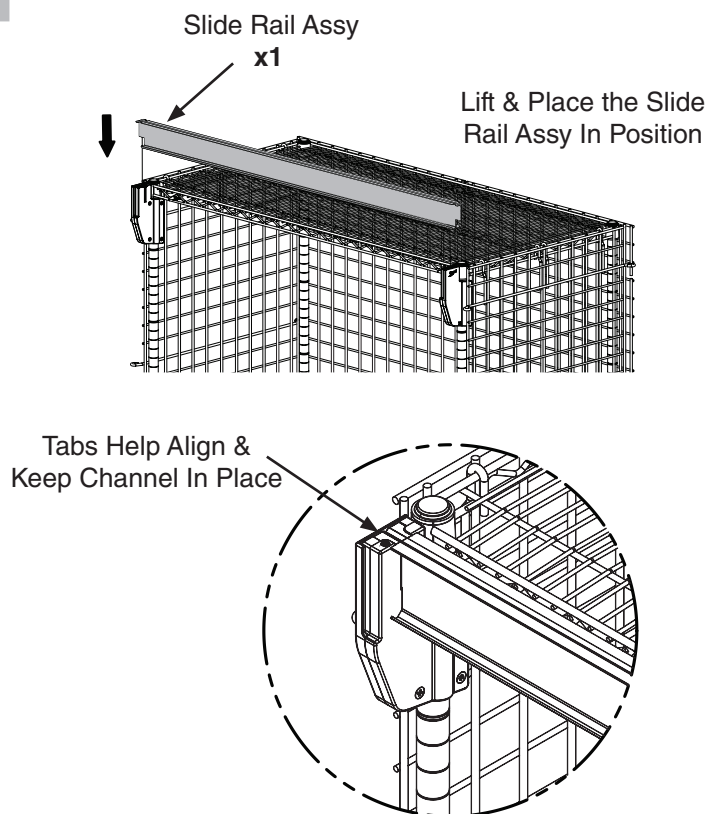


5

1. Tilt the Left Door approximately 20 degree and rest the Door Rollers on the Back Channel of the Top Rail.
2. Let Bottom Of Door Swing Forward.

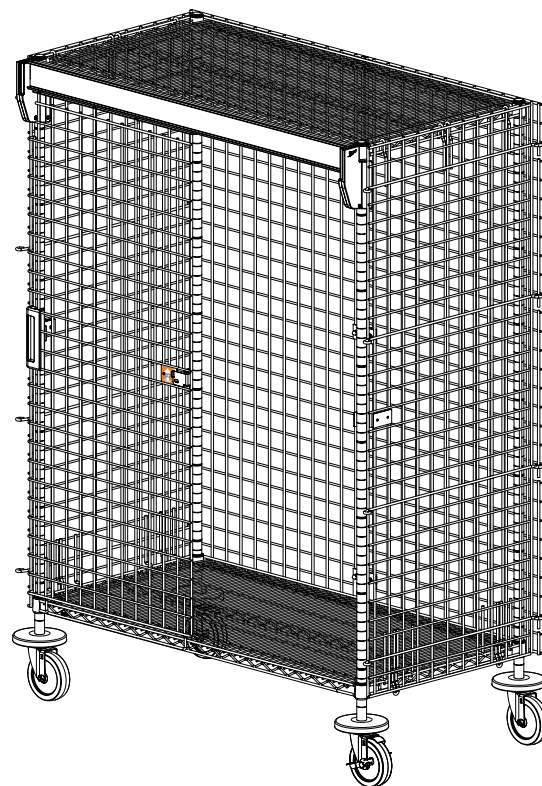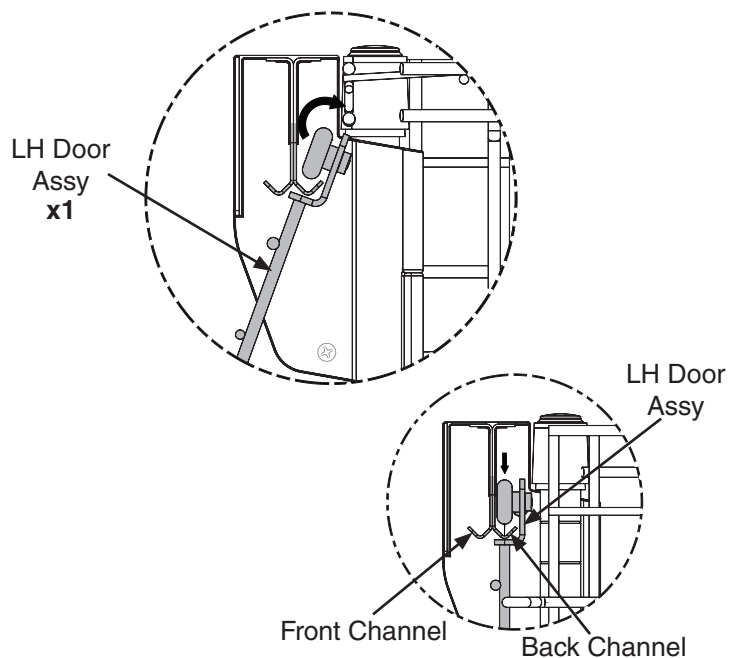

6


1. Weld Studs Go Through Snake Frame
And Are Secured In The Back

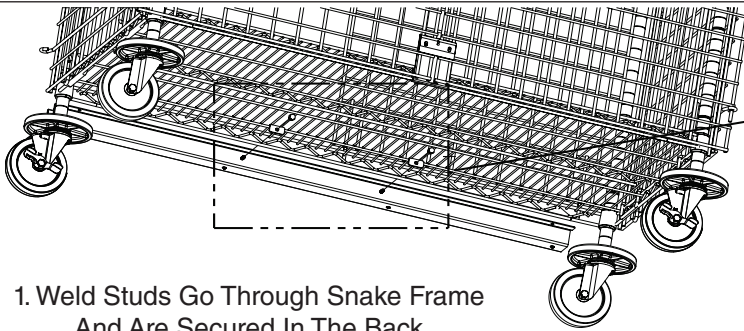


Mounting
Plate
x2

Bottom Channel
Assy
x1

#1/4 -20
Nylock Nut
x2


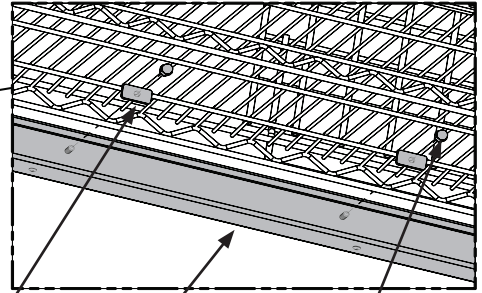


2. Secure Bottom U-Channel and Security
Bracket With #1/4-20 Screw

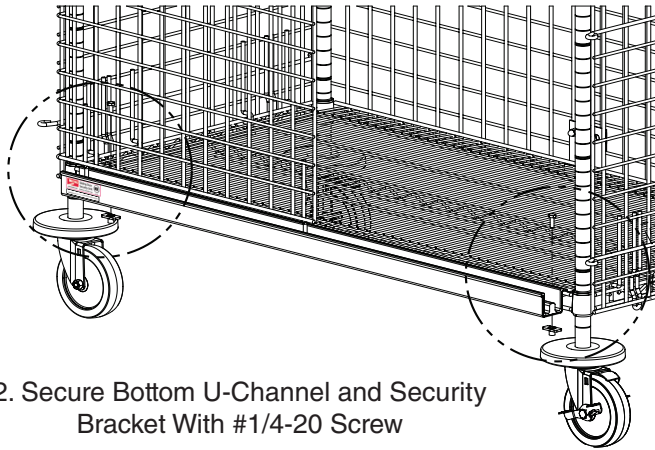

#1/4-20
Screw
x2


Security
Bracket
x2

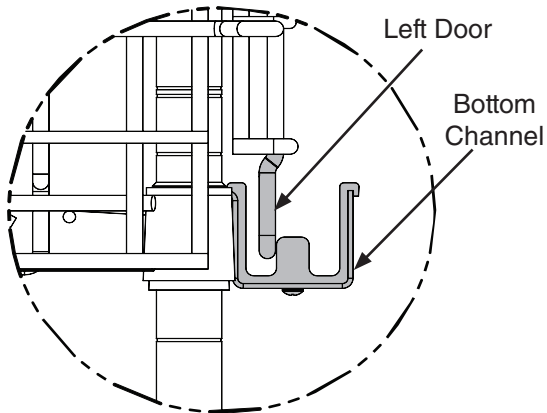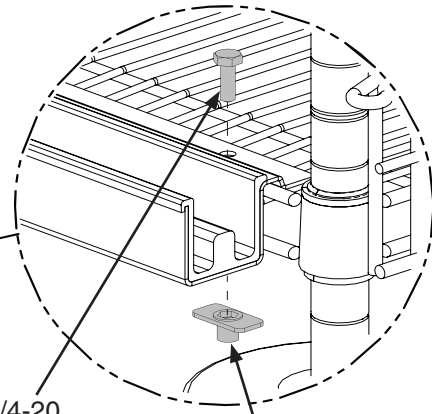

Left Door

Bottom
Channel

3. Secure Bottom U-Channel.
Make Sure the Left Door is aligned
in the Back of the U- Channel.

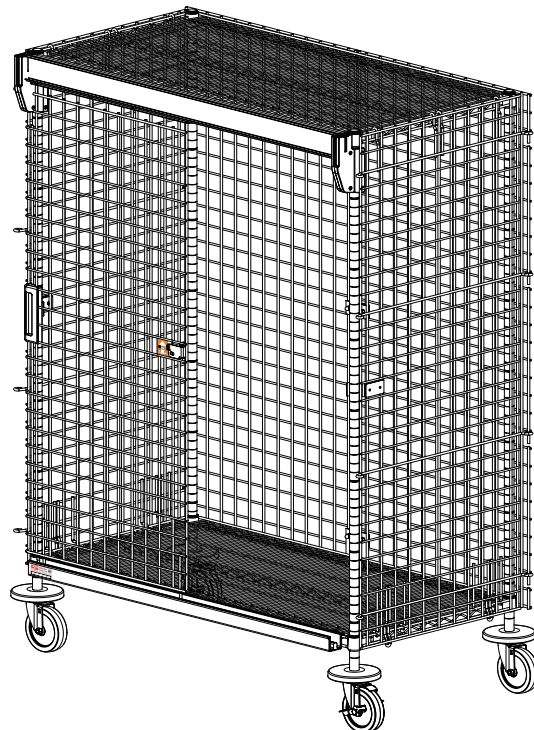


SECURITY CART SLIDING DOOR— INSTRUCTIONS FOR USE

7

Lift & Place Right Door
On Front Rail

RH Door
Assy
x1


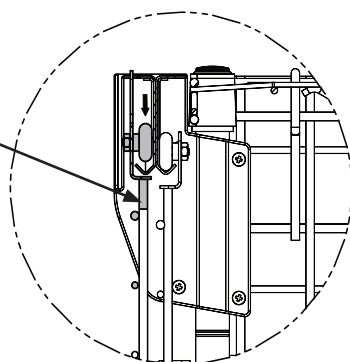


Make Sure Bottom is Aligned
With The Front Channel

RH Door
Assy
x1

Front Channel

Back Channel

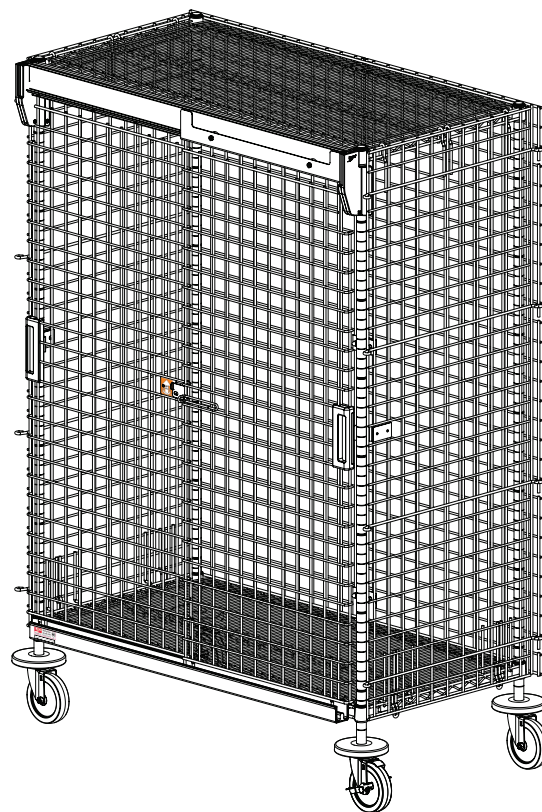


8

1. Align Top Shroud Cover
With Slots Inside Rail mounts



Rail
Cover
x1

Rail Mount
Slot



2. Secure With 2 Security
Screws on each end.


#10-24
Button Head
Screw
x2

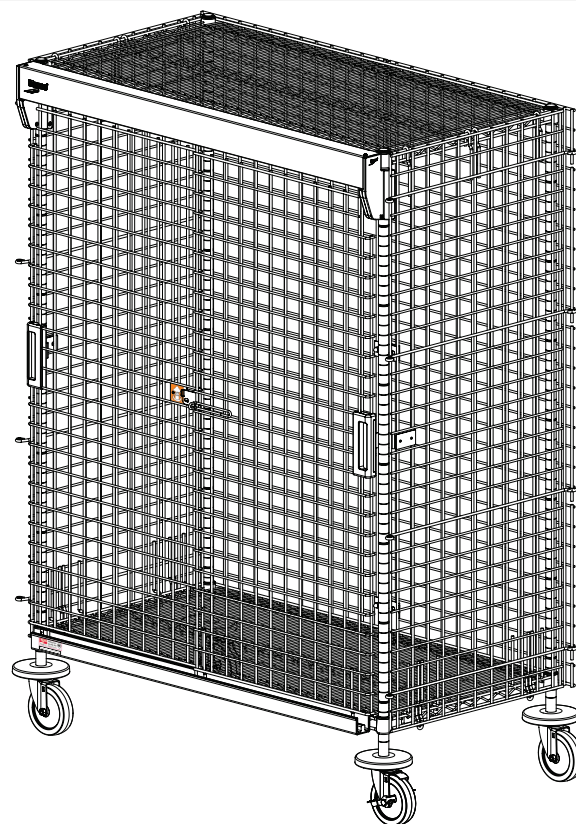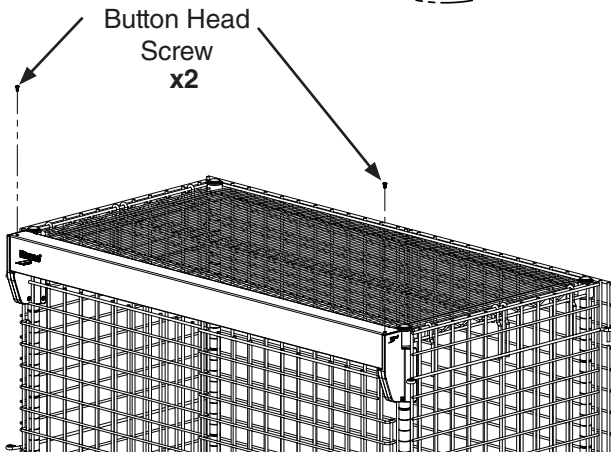


9

DOOR OPERATION - LOCKING


1. Make Sure Left Door is on Left Side and Right Door is on Right Side of Cart.

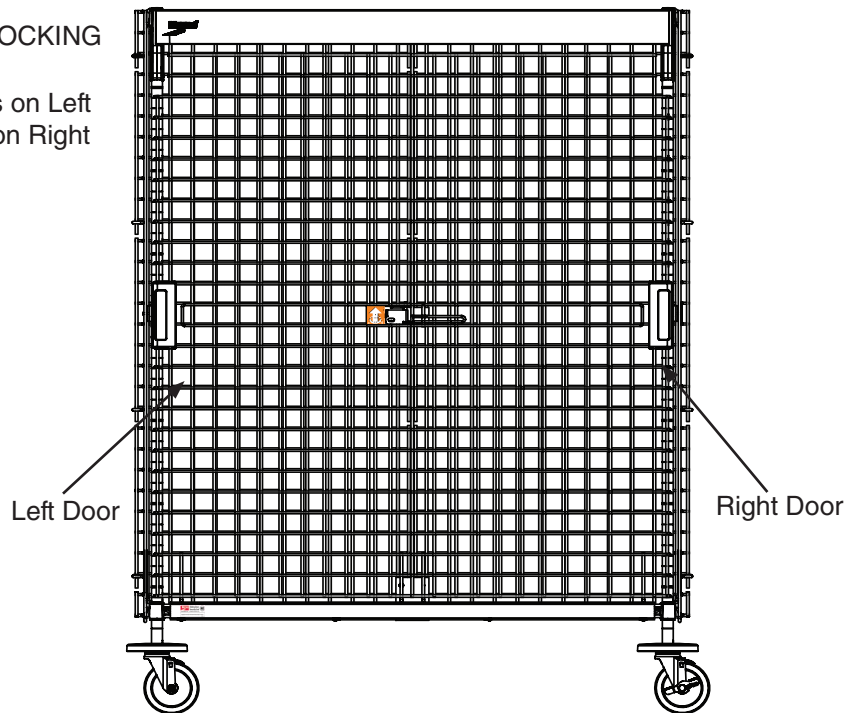


2. Lift the Latch upward.

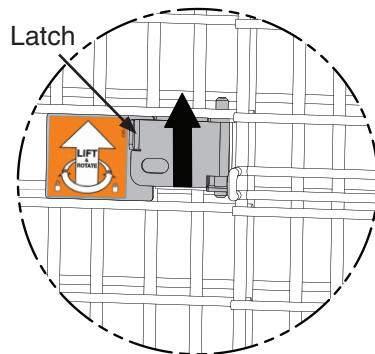


3. Rotate the Latch, till it touches the Wire Loop.

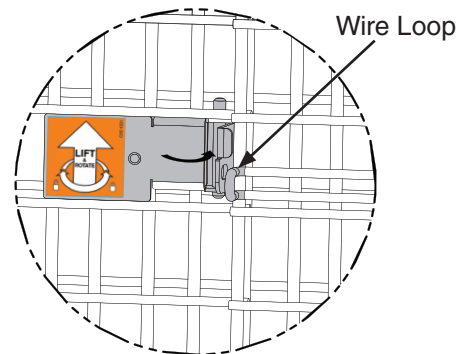

4. Move the Latch down.

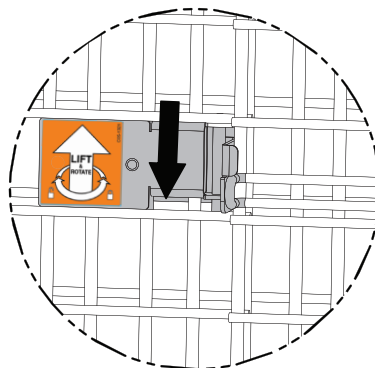


Lock not included


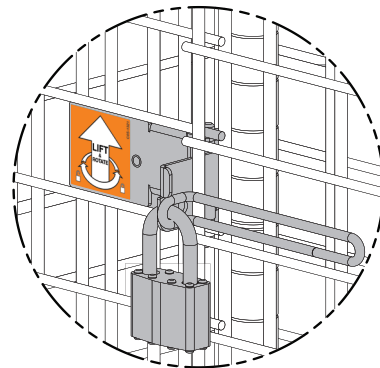


9


DOOR OPERATION - UNLOCKING

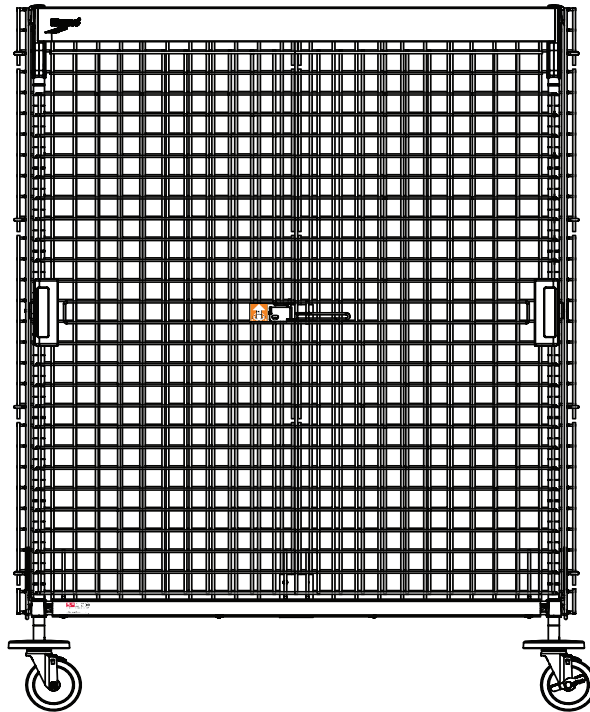


1. Lift the Latch upward.

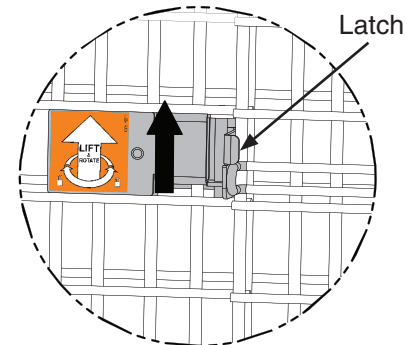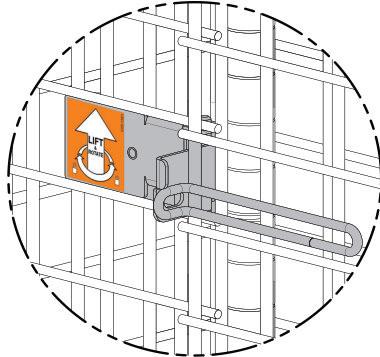

2. Rotate the Latch back.

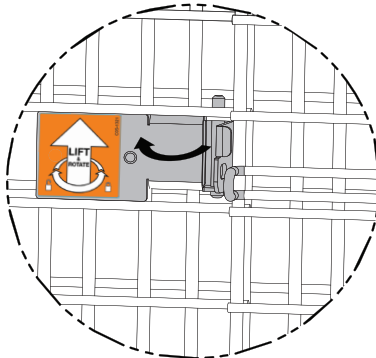


3. Move the Latch down.

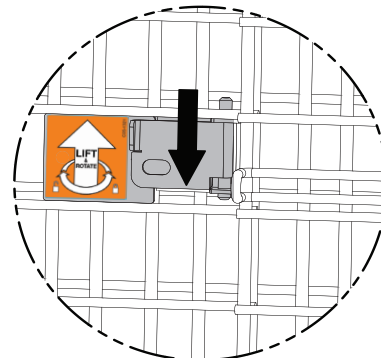



CAUTION

- Always Use Handles To Open And Close The Doors. Failure To Do That Will Cause Injury To The Hand.

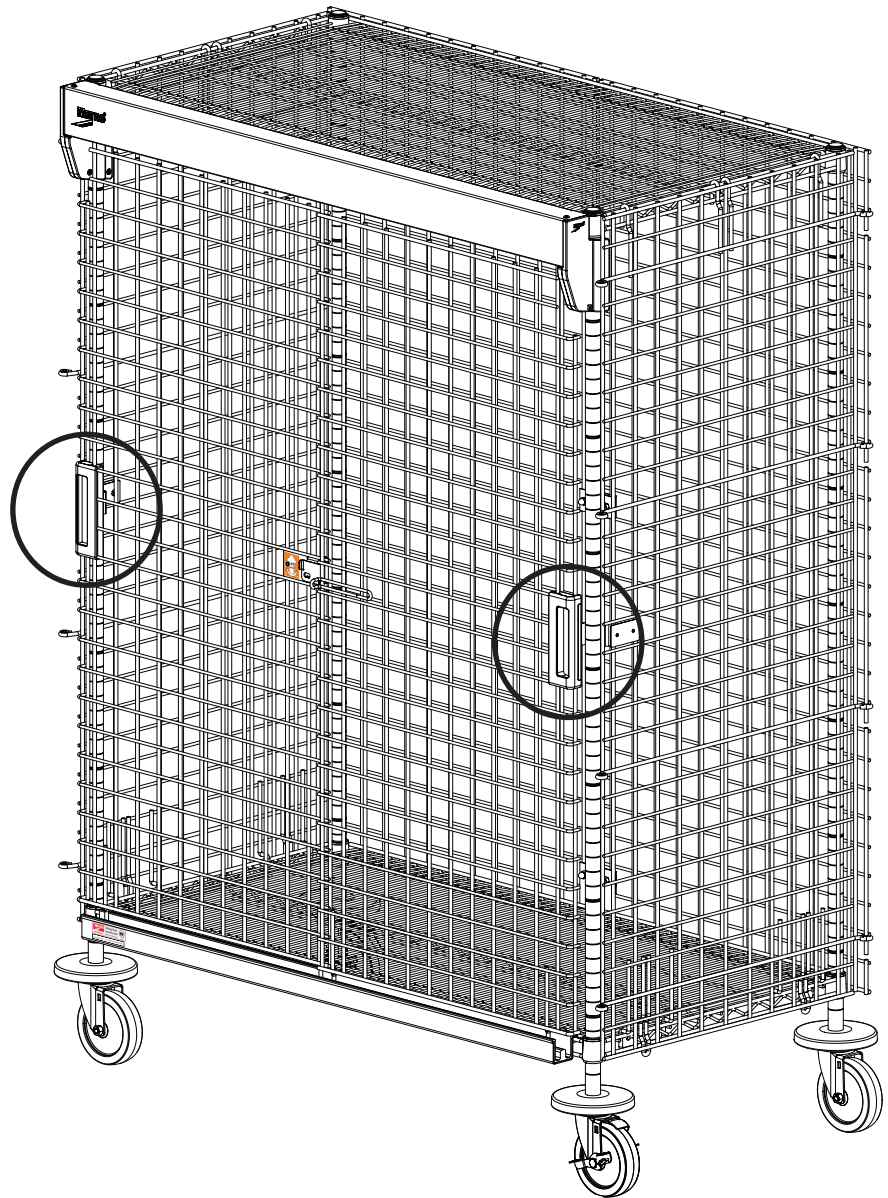

THIS COMPLETES THE INSTALLATION OF SECURITY CART WITH SLIDING DOOR.



We put space to work.®

an Ali Group Company



The Spirit of Excellence