



### fitted with

work equipment  
 connected load  
 glare-free  
 system of protection  
 class of protection  
 usage  
 luminaire body  
 material  
 surface  
 colour  
 lamp cover  
 tubular sections  
 colour  
 weight (net)  
 mains lead  
 fastening


### special features

1 x LED lamp  
 light colour daylight white, Color Rendering Index (CRI) >= 75  
 electronic transformer  
 24V AC/DC  
 without  
 IP 20 (67)  
 II  
 without switch

aluminium  
 anodised  
 Jet black  
 glass screen

Jet black  
 approx. 1.1 kg (2.4 lbs)  
 approx. 3.0 m (10 ft); with two prong plug  
 screw-down flange, table clamp (accessory), wall bracket (accessory)  
 Spot with 6° angle of reflected beam

### illuminance

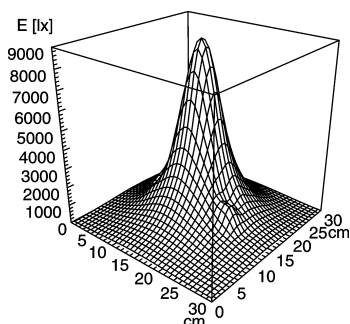

measuring conditions: d=50cm; I=700mA

E<sub>min</sub>: 69 lx  
 E<sub>m</sub>: 1219 lx  
 E<sub>max</sub>: 8966 lx

